

BATCH PASTEURISER (CAP: 150- 1000 ltr)

MOC

INNER SHELL:	2 / 3 MM SS 304
OUTER JACKET:	2 MM SS 304
DIMPLE JACKET:	1.6 MM SS 304
TOP LOOSE COVER :	2 MM SS 304


NOTE- CAN ALSO BE SUPPLIED WITH SS 316

TECHNICAL DATA

	INNER SHELL PRESSURE (BAR)	DIMPLE JACKET PRESSURE (BAR)
TEST	ATM	6 (MAX)
WORK	ATM	4 (MAX)

INSULATION

CAPACITY (LTR)	TYPE	THICKNESS (MM)
150	ROCK WOOL	75
200	ROCK WOOL	75
500	ROCK WOOL	75
1000	ROCK WOOL	75

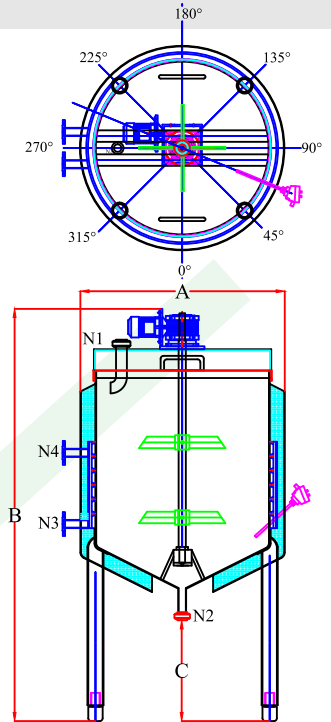

NOZZLES & ACCESSORIES

PRODUCT INLET	38 / 51 MM	SMS UNION
PRODUCT OUTLET	38 / 51 MM	SMS UNION
STEAM / HOT WATER INLET	25 / 38 NB	FLANGE
CONDENSATE / HOT WATER OUTLET	25 NB	FLANGE

N1- PRODUCT INLET
N2- PRODUCT OUTLET
N3- STEAM / HOT WTR INLET
N4- COND. / HOT WTR OUTLET

AGITATOR , MOTOR DATA

OVER ALL DIMENSIONS (MM)

CAPACITY (LTR)	MOTOR POWER (HP)	GEAR BOX MODEL	AGITATOR SPEED (RPM)	A	B	C	SHELL -ID	SHELL -HEIGHT	NO. OF LEGS
150	0.5	ALM-63	36	710	1430	400	600	625	4
200	0.5	ALM-63	36	830	1460	400	720	625	4
500	1.5	ALM-75	36	940	2070	400	780	1200	4
1000	3	ALM-90	36	1260	2155	400	1100	1200	4

OPTIONS

★ CAN ALSO BE SUPPLIED WITH -

- 1- SLOPE BOTTOM
- 2- DISH END BOTTOM.
- 3- SWEEP TYPE AGITATOR BLADE.
- 4- CONICAL TOP / DISH END WITH MAN HOLE.
- 5- BAFFLE PLATE TO BREAK THE VERTIX.

★ SPEED OF AGITATOR CAN ALSO CHANGE IF REQUIRED BY PROCESS CONDITIONS.

ADDITIONAL ACCESSORIES

- ★ CIP CONNECTION IN CASE OF CLOSE TOP WITH MAN HOLE.
- ★ LEVEL INDICATOR / SENSOR.
- ★ TEMPERATURE INDICATOR AND SENSORS.