

## INSULATED MILK STORAGE TANK (CAP: 1000~10,000 LTR)

### MOC

INNER SHELL:	2/3	MM	SS 304
OUTER JACKET:	2	MM	SS 304
TOP CONICAL :	2	MM	SS 304
BOTTOM FLAT :	3	MM	SS 304

NOTE- CAN ALSO BE SUPPLIED WITH SS 316

### TECHNICAL DATA



	INNER SHELL PRESSURE (BAR)	OUTER JACKET PRESSURE (BAR)
TEST	ATM	ATM
WORK	ATM	ATM

### INSULATION

ROCK WOOL 75 / 100 MM THICKNESS

### NOZZLES

PRODUCT INLET	51 MM	SMS UNION
PRODUCT OUTLET	51 MM	2-W P. VALVE

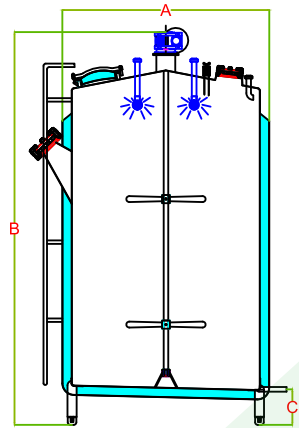

### AGITATOR , MOTOR DATA

### OVER ALL DIMENSIONS (MM)

CAPACITY (LTR)	MOTOR POWER (HP)	GEAR BOX MODEL	AGITATOR SPEED (RPM)	A	B	C	SHELL -ID	SHELL -HEIGHT
1000	2	ALM-90	40	1264	1619	300	1100	1200
2000	2	ALM-90	40	1608	1885	300	1450	1200
3000	2	ALM-90	40	1658	2424	300	1450	2000
4000	3	ALM-110	40	1808	2850	300	1650	2000
5000	3	ALM-110	40	2008	3385	300	1800	2000
10,000	3	ALM-110	40	2258	4302	300	2050	3250

### OPTIONS

- ★ SPEED OF AGITATOR CAN ALSO CHANGE IF REQUIRED BY PROCESS CONDITIONS.

### ADDITIONAL ACCESSORIES

- ★ LEVEL INDICATOR / SENSOR.
- ★ TEMPERATURE INDICATOR AND SENSORS.

### CAN ALSO BE SUPPLIED WITH....

TOP CONICAL / DISH END.

MAN HOLE , AIRVENT, DIP STICK, LIGHT GLASS , SITE GLASS etc.

LADDER SUPPORT INSIDE (MONKEY LADDER) OR OUTSIDE OF TANK.