

INCUBATION TANK (CAP: 150-500 LTR)

WORKING CAPACITY-300 LTR

MOC

INNER SHELL: 2/3 MM SS 304

OUTER JACKET: 2 MM SS 304

DIMPLE JACKET: 1.6 MM SS 304

NOTE- CAN ALSO BE SUPPLIED WITH SS 316

TECHNICAL SPECIFICATIONS

DIMPLE JACKET PRESSURE DETAILS

TESTING PRESSURE: 4 BAR (MAX)

WORKING PRESSURE: 3.5 BAR


INSULATION

CAPACITY(LTR)	TYPE	THK
150	ROCK WOOL	50 MMM
200	ROCK WOOL	50 MMM
300	ROCK WOOL	50 MMM
500	ROCK WOOL	75 MMM

NOZZLES AND ACCESSORIES

MEDIAM	SIZE (MM)	CONNEC.
PRODUCT INLE-	38 / 51	SMS UNION
PRODUCT OUTLET	38/51	SMS UNION
STEAM / WTR INLET	25 / 38	SMS UNION
COND. / WTR OUTLET	25	SMS UNION

	CAPACITY LTR	SHELL (ID) (MM)	SHEEL HT (MM)	AGITATOR , MOTOR			
				CAPACITY (LTR)	SPEED (RPM)	POWER (HP)	GEAR BOX
DIMENSIONS	150	600	625	150	22	0.5	ALM-63
	200	720	625	200	22	0.5	ALM-63
	300	800	625	300	22	1	ALM-75
	500	800	1250	500	22	1.5	ALM-75
				A(MM)	B(MM)	C(MM)	LEGS (NOS)
	150	600	625	960	1325	400	4
	200	720	625	1080	1325	400	4
	300	800	625	1155	1325	400	4
	500	800	1250	1155	1950	400	4

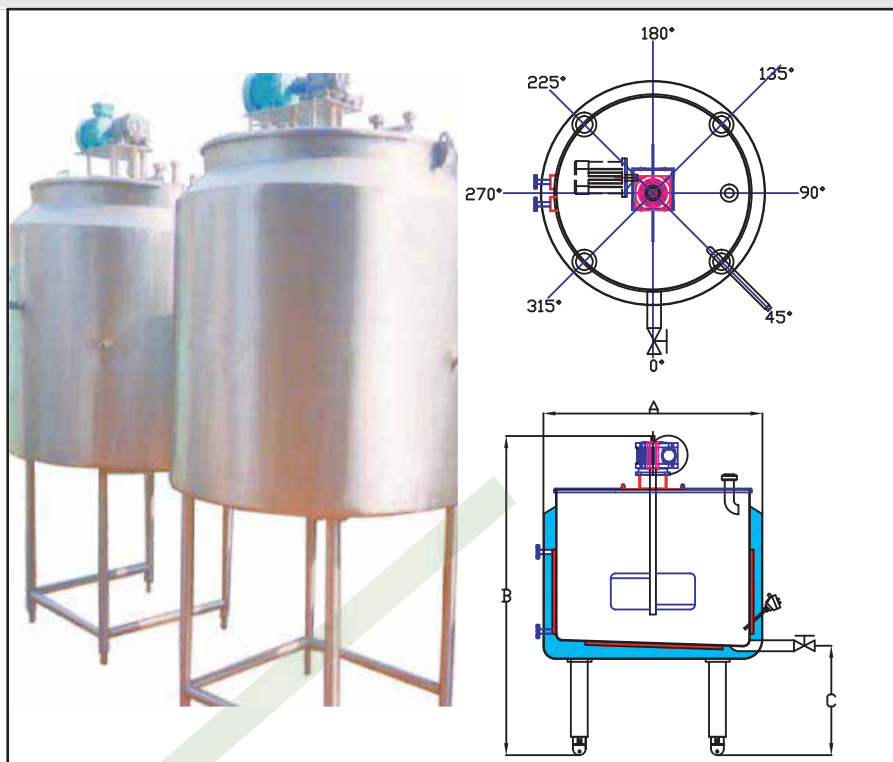

OPTIONS

- 1-CAN ALSO BE SUPPLIED WITH SLOPE BOTTOM./DISH END BOTTOM.
- 2-CAN BE SUPPLIED WITH SWEEP TYPE AGITATOR BLADE.
- 3-CAN ALSO BE SUPPLIED WITH CONICAL TOP/DISH END WITH MAN HOLES.
- 4-CAN BE SUPPLIED WITH BAFFLE PLATES TO BREAK THE VERTEX DURING AGITATOR.
- 5-SPEED OF AGITATOR CAN ALSO CHANGE IF REQUIRED BY PROCESS CONDITIONS.

ADDITIONAL ACCESSORIES

- 1-CIP CONNECTION IN CASE OF CLOSE TOP TANK WITH MAN HOLE.
- 2-LEVEL INDICATOR/SENSOR.
- 3- TEMPERATURE INDICATOR AND SENSORS.