


# HOLDING TUBE SERIES

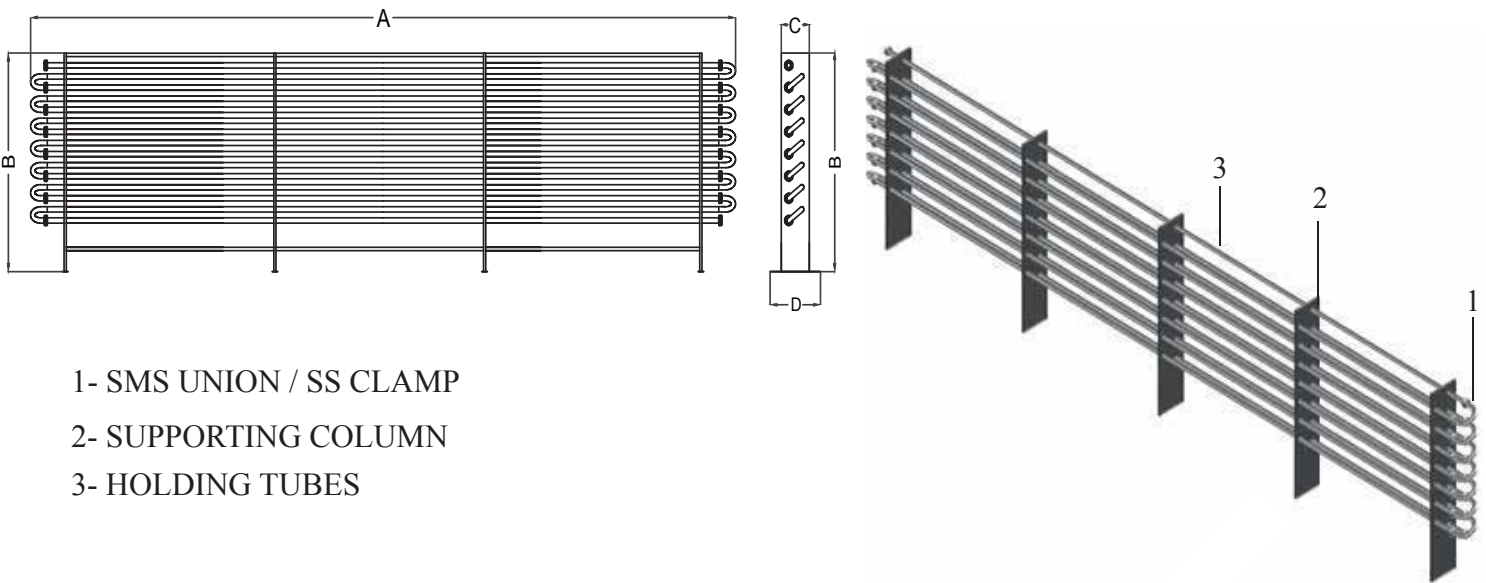

- 1- SMS UNION / SS CLAMP
- 2- SUPPORTING COLUMN
- 3- HOLDING TUBES

Holding tubes can also be pre-fit with a Flow Diversion Valve (FDV) that will divert unpasteurized product back to a balance tank, send pasteurized product to forward flow and provide leak detection

Holding tubes provide a fixed volume of tubing to "hold" a product for a set period of time at a given flow rate.

- We offer holding tubes on the basis of capacity required.
- Ved Engineering will assist you in sizing the right holding tube for your application.
- Holding tube can be supplied with Flow Diversion Valve (FDV)

## MOC DETAILS

1- SMS UNION / SS CLAMP	SS 304
2- SUPPORTING COLUMN	SS 304
3- HOLDING TUBES	SS 304

**\*OPTION : ALSO SUPPLIED WITH SS 316**

Common Applications for Holding Tubes :

- Milk, Yogurt
- Cream
- Juices & Sauces

## DIMENSION (MM)

A	B	C	D
3190~6190	1550	250	450

CAPACITY PER HOUR	HOLDING TIME	MODEL NO.	OD OF DIARY PIPE (mm)	LENGTH OF DIARY PIPE (mtr)
1000 LTR	6 MINUTE	VHT-1KL-6M	38.1	102
	8 MINUTE	VHT-1KL-8M	50.8	72
	10 MINUTE	VHT-1KL-10M	50.8	90
2000 LTR	6 MINUTE	VHT-2KL-6M	50.8	108
	8 MINUTE	VHT-2KL-8M	63.5	90
	10 MINUTE	VHT-2KL-10M	63.5	114
3000 LTR	6 MINUTE	VHT-3KL-6M	63.5	102
	8 MINUTE	VHT-3KL-8M	63.5	138
	10 MINUTE	VHT-3KL-10M	63.5	174
5000 LTR	6 MINUTE	VHT-5KL-6M	63.5	175
	8 MINUTE	VHT-5KL-8M	63.5	234
	10 MINUTE	VHT-5KL-10M	63.5	293
10000 LTR	6 MINUTE	VHT-10KL-6M	63.5	351
	8 MINUTE	VHT-10KL-8M	63.5	468
	10 MINUTE	VHT-10KL-10M	63.5	585

\* Ved Engineering reserves the right to change specifications